

NC203E

fixing clip @ 600 centers

Drained and vented cavity as per E2/AS1

Wall underlay folded into opening

Flexible flashing tape over flashing upstand

2.8x50mm hot dipped galvanised clout nails in to framing @ 600 centers. (SS for Exposure Zone D)

16mm H3.2 timber head-batten *See note

NC226

Impervious barrier between batten & cladding

Cavity closer as per E2/AS1 (By others)

NC101

Starter strip

5mm min gap

10mm min cover

Sealant for Very High to Extra High wind zones.

NC227


Plastic soaker flashing behind jamb. Flashing base extends down into channel on immediate board below

NOTE 1:

Rigid Air Barrier (RAB) also required in Extra High wind zones. Refer to E2/AS1 (section 9.1.7.2)


NOTE 2:

Detail depicts use of starter strip to locate a full board. Refer to NW-HOC-020 where a notched board occurs

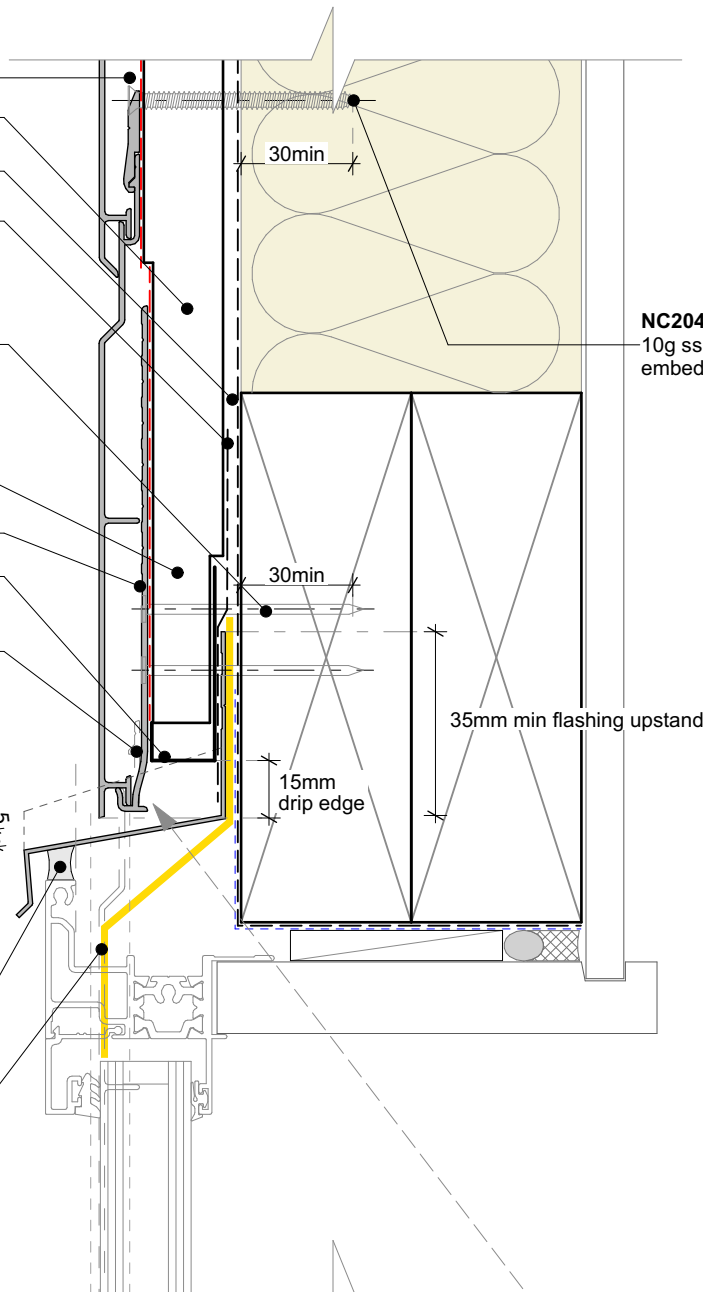

NC204

10g ss csk screws with 30mm min embedment



Stop-end tabbed up on both sides of head flashing

General note:

- Cladding fixings omitted for clarity

Window setting out notes:

- 17-18mm for hollow fin windows
- 18-20mm for solid fin windows

Cavity batten note:

- 20mm timber battens required for all Nu-Wall horizontal board installations
- Batten to have 15° slope for moisture egress
- Battens to all internal, external corners, jambs, and sills to be sized to 18mm to accommodate flashing build up
- 20 and 18mm single castellated battens are available directly from Nu Wall
- Proprietary Nu-Wall AliBat is available as an alternative when a structural non-combustible batten is required

Interactive assembly instructions available

<http://wks.nz/nw-hoc-win>



Get WORKINGSPEC from Apple App Store/Google Play



BRANZ Appraised Appraisal No. 550 [2019]



Nu-Wall cladding horizontal on cavity
 Typical head section - full board using NC101 starter

NW-HOC-017.02

Drawn by: Nu-Wall Date: 20/9/22

Checked by: RL, GT Scale: 1:2 @ A4

© 2021 copyright in this document is the property of Nu-Wall Aluminium Cladding Limited. All rights reserved. Nu-Wall is a registered trademark of Aluminium Product Brands NZ Limited